
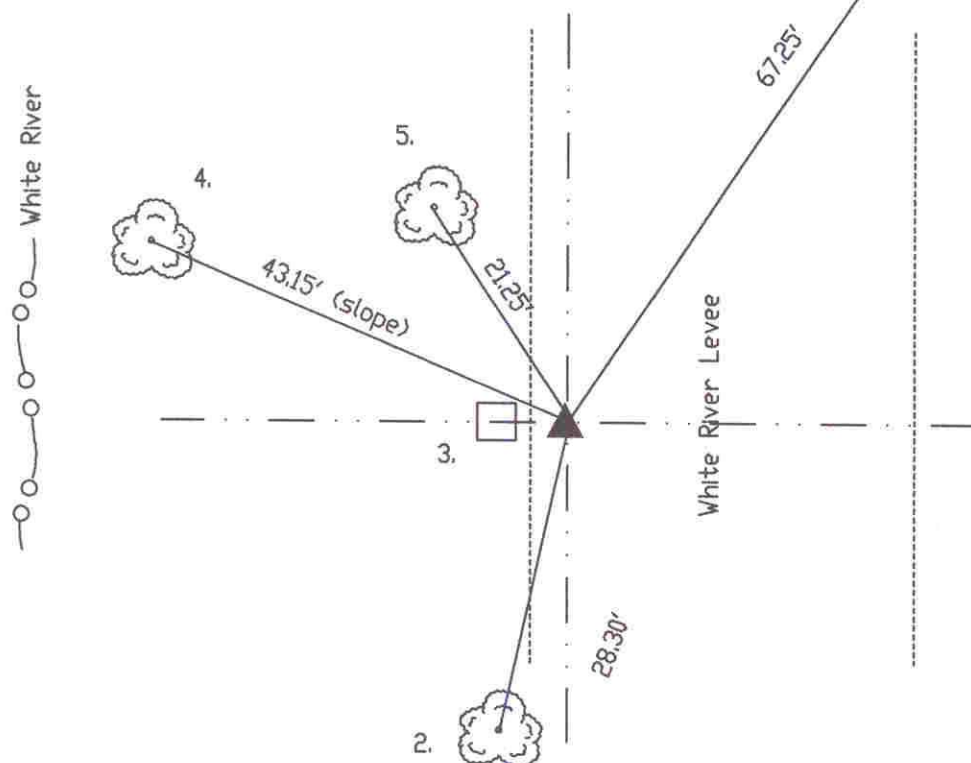


OFFICE OF THE MARION COUNTY SURVEYOR  
 SECTION RECORD CORNER  
 SECTION 17 TOWNSHIP 14 RANGE 3  
 DATE: 10-22-98  
 PARTY CHIEF: Kiste  
 CREW: \_\_\_\_\_  
 TYPE OF MARKER: Harrison Fd  
 METHOD OF ESTABLISHMENT: County: 3-16-89

IN. S.P.C. E ZONE, NAD 83  
 NAME: 14031704  
 N: 489438.8331(m)  
 E: 51274.8217(m)

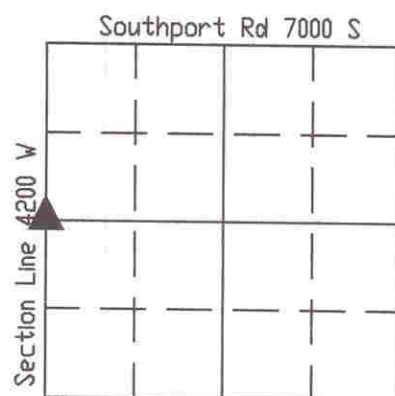

Original post set 1821 by Laughlin with witnesses: 18" hackberry N 47 E 43 links, 20" hackberry N 71 W 11 links per Marion County Atlas pg. 5. No reference found to the corner in Marion County Surveyor's Office. Corner was excavated 3-16-89 and Harrison set per survey by Easley dated 1971. Re-tied 10-22-98 by Kiste.

HC431704

REF.	DISTANCE	DESCRIPTION
1.	67.25'	Mag nail w/washer W 18" twin hackberry 12'up
2.	28.30'	Mag nail w/washer E 18" mulberry 24'up
3.	3.5'	Due W to MCSO sign post
4.	43.15'	Mag nail w/washer (top of knot on) E 36" twin cottonwood 36'up
5.	21.25'	Mag nail w/washer E 30" silver maple 48'up